


SCHEDA TECNICA - TECHNICAL SHEET

FS

Fascetta per cablaggio in nylon
Nylon cable tie

Rev: 06
Pag. 1/1


DATI TECNICI - TECHNICAL DATA

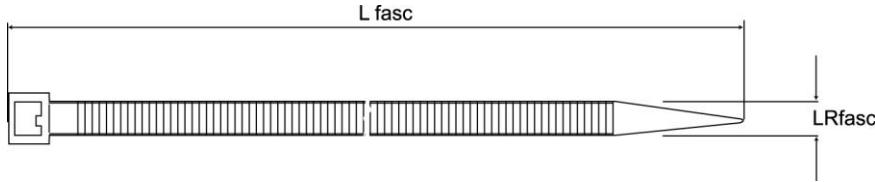

dt = diametro tubo / tube diameter
LRfasc = larghezza fascetta / fastener width
Lfasc = lunghezza fascetta / fastener length

dt max [mm]	Lfasc [mm]	LRfasc [mm]	Resistenza a trazione minima Min tensile resistance [kgf]	Fascetta nera Black cable tie Cod.	Fascetta Bianco White cable tie Cod.	Fascetta Verde Green cable tie Cod.
15	80	2,4	8,0	36300p24080	36300m24080	
22	100	2,5	8,1	36300p25100	36300m25100	36300z25100
33	140	2,5	8,1	36300p25142	36300m25142	
40	160	2,5	8,1	36300p25160	36300m25160	
53	200	2,5	8,1	36300p25203	36300m25203	
33	140	3,6	18,2	36300p36140	36300m36140	
33	150	3,6	18,2			36300z36150
53	200	3,6	18,2	36300p36203	36300m36203	36300z36203
76	300	3,6	18,2	36300p36300	36300m36300	
102	370	3,6	18,2	36300p36370	36300m36370	
24	120	4,8	22,2	36300p48120	36300m48120	
38	160	4,8	22,2	36300p48160	36300m48160	
46	190	4,8	22,2			36300z48190
50	200	4,8	22,2	36300p48200	36300m48200	
60	250	4,8	22,2	36300p48250	36300m48250	
76	300	4,8	22,2	36300p48300	36300m48300	36300z48300
102	370	4,8	22,2	36300p48370	36300m48370	
110	430	4,8	22,2	36300p48432	36300m48432	
52	203	7,6	54,4	36300p76200	36300m76200	
76	300	7,6	54,4	36300p76300	36300m76300	
102	370	7,6	54,4	36300p76370	36300m76370	
132	450	7,6	54,4	36300p76450	36300m76450	
140	533	7,6	54,4	36300p76533	36300m76533	
228	776	9,0	79,4	36300p90776	36300m90776	

INSTALLAZIONE - INSTALLATION

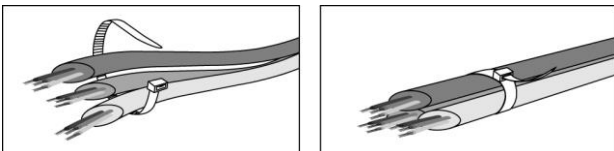

Temperatura di posa: Installation temperature:	-10 / +60 °C
Temperatura di esercizio : Working temperature:	-40 / +85 °C
Autoestinguento a norma UL 94 – classe V2 Fire resistant in compliance with norm UL 94 – class V2	

CARATTERISTICHE ANCORANTE PRODUCT FEATURES

Tipo Type	Materiale Material
Fascetta Cable tie	Nylon Pa 66